

**TAMPER & SAND RAMMER**

# TAMPER & SAND RAMMER

Toku tampers are ideal for compacting backfill for trenches and compacting soil around foundations and other structures.



T-6



TB-00G TB-0G



TF-1N TF-2N

MODEL	PISTON DIAMETER mm	PISTON STROKE mm	BLOW PER MIN. b.p.m.	NET WEIGHT kg lb	OVERALL LENGTH mm	BUTT DIAMETER mm	AIR CONSUMPTION m <sup>3</sup> /min c.f.m.	HOSE SIZE mm	AIR INLET SIZE PT
TB-00G	18	50	1,600	1.7 3.7	280	51.5	0.25 8	12.7	3/8
TB-0G	22	65	1,000	2.7 5.9	395	54	0.3 9.6	12.7	3/8
TF-1N	25.4	100	800	6.8 15	1,070	67	0.7 22.4	12.7	1/2
TF-2N	32	125	700	9 19.8	1,105	75	0.85 27.2	12.7	1/2
T-6	38	140	600	18 40	1,240	146	1.1 38.9	12.7	1/2

**AIR AUGER DRILL**


# AIR AUGER DRILL

Water swivel attachment available to control dust and chips from drilling.



TAA-400


## ACCESSORIES FOR AUGER DRILL

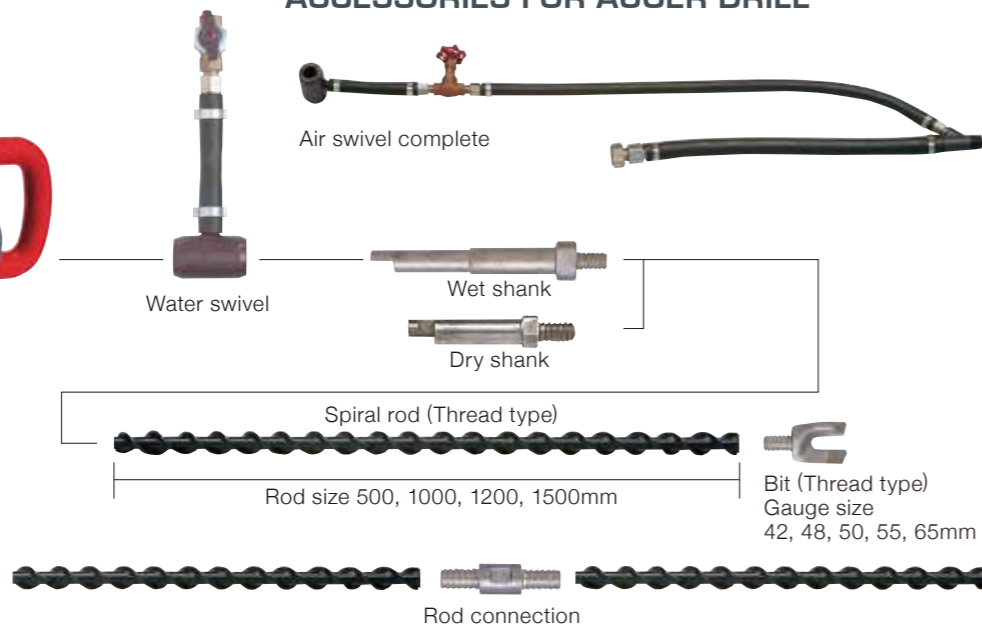

MODEL	PUT OUT mm	SPEED AT NO LOAD r.p.m.	SPEED AT LOAD r.p.m.	NET WEIGHT kg lb	OVERALL LENGTH mm	AIR CONSUMPTION m <sup>3</sup> /min c.f.m.	HOSE SIZE mm	AIR INLET SIZE PT	START TYPE
TAA-400	4.0	1,200	600-950	10.2 22.5	275	3.4 119	19	3/4	LEVER TYPE

**ROD**

# ROD



## TAPER ROD FOR ROCK DRILL

TYPE	SHANK SIZE (HXR)	OVERALL LENGTH (L)
22HS	7/8×3-1/4	0.3, 0.4, 0.5, 0.6, 0.9, 1.0, 1.2, 1.5, 1.8, 2.0, 2.1, 2.4, 2.5, 2.7, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5
22HL	7/8×4-1/4	

## TAPER ROD FOR ROTARY HAMMER

TYPE	SHANK SIZE (H)	OVERALL LENGTH (L)
15T	R3/4×5/8H	0.25, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.1
19T	R3/4×5/8H	0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0

**BIT**

# BIT



## CARR BIT(TAPER ROD TYPE)

TYPE	G SIZE (mm)	AVAILABLE TAPER ROD
TC-22	28,30,32,34,36,38,40,42,44,46,48	22HS,22HL



## CROSS BIT(TAPER ROD TYPE)

TYPE	G SIZE (mm)	AVAILABLE TAPER ROD
TX-22	28,30,32,34,36,38,40,42,44,46,48,50,55,60,65	22HS,22HL



## REAMING BIT SET

TYPE	G SIZE (mm)	AVAILABLE TAPER ROD
TXW-	60,70,80,90,100,110,120,130,150	22HS,22HL

NOTE:FOR 130 AND 150 , SPECIAL ROD SHOULD BE USED.

Reaming Bit Set



Bit

Reaming Bit

Adapter

**HOSE COUPLING**

# HOSE COUPLING



Joint-nipple

Spud



Hose Nut



Stem



Hose Band

Coupling (Size)1/2",3/4",1",1-1/4",1-1/2",2"