

AA CHIPPING HAMMER

AA CHIPPING HAMMER

- Precision valve allows excellent control during operation.
- Replaceable bushing
- 2 types of bushing ,round or hex, are available.
- Anti-vibration handle is available for AA-1.3B.



AA-0B



AA-1.3B



AA-3B



TYC-6B

MODEL NO.	PISTON DIAMETER mm	PISTON STROKE mm	BLOW PER MIN. b.p.m.	NET WEIGHT kg lb	OVERALL LENGTH mm	AIR CONSUMPTION m ³ /min c.f.m.	HOSE SIZE mm	SHANK SIZE ROUND OR HEX	AIR INLET SIZE PT
AA-0B	20	50	3,600	2 4.4	254	0.35 12.4	12.7	R15/12H×53	3/8
AA-1.3B	24	58	2,800	4.5 9.9	320	0.45 15.9	12.7	R18/15H×60	3/8
AA-3B	28	79	2,400	5.8 13.9	330	0.45 15.9	12.7	R18/15H×60	3/8
TYC-6B	28.54	75	1,800	6.7 14.8	430	0.8 28.2	12.7	R18/15H×60	3/8

CHIPPING HAMMER

CHIPPING HAMMER

- Available in 1" to 4" stroke for wide selection to suit variety of applications.
- Replaceable bushing
- 2 types of bushing, round or hex, are available.
- 2 types of retainer, cup and spring, are available.(THA-4B)
- Four bolt handle for excellent durability and maintenance.(TCH-3&4)

Goose Neck Handle



THA-2B

THA-3B

THA-4B



THA-4S

4-Bolt Handle



TCH-3

TCH-4

MODEL NO.	PISTON DIAMETER mm	PISTON STROKE mm	BLOW PER MIN. b.p.m.	NET WEIGHT kg lb	OVERALL LENGTH mm	AIR CONSUMPTION m ³ /min c.f.m.	HOSE SIZE mm	SHANK SIZE ROUND OR HEX	AIR INLET SIZE PT
THA-2B	28.54	51	2,300	6.2 13.6	413	0.85 30	12.7	R18/15H×60	3/8
THA-3B	28.54	64	2,200	6.8 15	450	0.9 31.8	12.7	R18/15H×60	3/8
THA-4B(S)	28.54	102	1,800	7 16.1	480	0.95 33.5	12.7	R18/15H×60	3/8
TCH-3	28.54	63.5	2,200	8.6 19	406	0.89 31.5	12.7	R18/15H×60	3/8
TCH-4	28.54	101.6	1,800	9 20	432	0.95 33	12.7	R18/15H×60	3/8

SINKER ROCK DRILL

SINKER ROCK DRILL

- Multiposition throttle for smooth start up in drilling.
- Well balanced body for efficient operation.
- Each component is carefully heat treated to maximize durability.
- Anti-vibration model is available on request.



TJ-15



TJ-15SV



TJ-20



TJ-20SV



TS-55

MODEL NO.	PISTON DIAMETER mm	PISTON STROKE mm	BLOW PER MIN. b.p.m.	ROTARY SPEED r.p.m.	NET WEIGHT kg lb	OVERALL LENGTH mm	AIR CONSUMPTION m ³ /min c.f.m.	HOSE SIZE mm
TJ-15	54	45	2,450	250	14 31	504	1.6 56.5	19
TJ-15SV	54	45	2,450	250	17.8 39	567	1.6 56.5	19
TJ-20	68	49	2,400	200	18.5 41	610	2.5 88.3	19
TJ-20SV	68	49	2,400	200	22.5 50	583	2.5 88.3	19
TS-55	66.6	64	1,800	200	27 60	581-S 606-L	2.6 91.8	19

ROTARY HAMMER

ROTARY HAMMER

- TH5-S is designed for a wide variety of construction and maintenance applications
- 15T and 19T taper rods are available.
- Insert bit is available.

INSERT BIT FOR ROTARY HAMMER

- INSERT BIT




TH5-S

SIZE G	SHANK SIZE	OVERALL LENGTH	SIZE G	SHANK SIZE	OVERALL LENGTH
13	R 3/4×5/8H	250, 350	18	R 3/4×5/8H	280, 400, 500, 600, 700
14	R 3/4×5/8H	230, 250, 400	19	R 3/4×5/8H	300, 400, 500, 600, 700
14.5	R 3/4×5/8H	250, 300	20	R 3/4×5/8H	280, 400, 500, 600, 700
15	R 3/4×5/8H	300	21.5	R 3/4×5/8H	300
16	R 3/4×5/8H	250, 280, 400, 500, 600, 700	22	R 3/4×5/8H	280, 400, 500, 600, 700
17.5	R 3/4×5/8H	300			

- 15T TAPER ROD



- 19T TAPER ROD

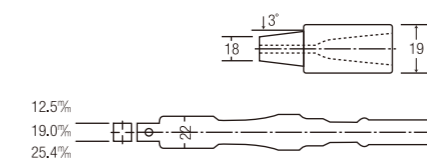

19X22 ADAPTER FOR ROTARY HAMMER
Bits for 22 taper rods can be used by 19 taper rods and this adapter.

SOCKET ADAPTER FOR ROTARY HAMMER
Mounting chemical anchor.

MODEL	ROTARY SPEED r.p.m.	BLOW PER MIN. b.p.m.	NET WEIGHT kg lb	OVERALL LENGTH mm	AIR CONSUMPTION m ³ /min c.f.m.	HOSE SIZE mm	SHANK SIZE PT
TH5-S	420	3,400	5.8 12.8	425	0.85 30	12.7	R3/4×5/8H